

Contents lists available at ScienceDirect

Energy

journal homepage: www.elsevier.com/locate/energy



Corrigendum

Corrigendum to "Experimental performance of a parabolic trough collector system for an industrial process heat application" Energy 215 (2021) 119288



Panayiotis K. Ktistis, Rafaela A. Agathokleous*, Soteris A. Kalogirou

Department of Mechanical Engineering and Materials Science Cyprus University of Technology, Limassol, Cyprus

The authors regret to realise a typing mistake on page 3, line 9. The number of 280 kW_{th} should be 280 kWh_{th}. Additionally, there is a problem in Fig. 5. The correct figure and the correct legend of the figure are as shown below:

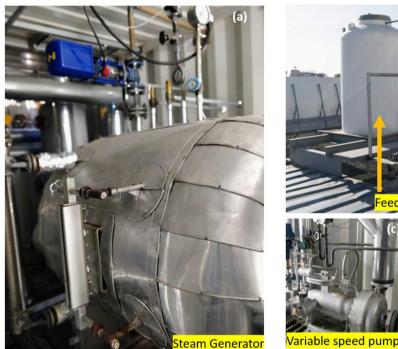




Fig. 5. (a) Steam generator (b) feed water tanks (c) variable speed pump (d) control valves. The authors would like to apologise for any inconvenience caused.

DOI of original article: https://doi.org/10.1016/j.energy.2020.119288.

^{*} Corresponding author.